

## 95S-1-11

### DSL POTS Splitter Module

CPE/Premise Wiring

MDU

Utility/Municipality




**Tii Technologies Inc.**

**Corporate Headquarters:**

141 Rodeo Drive  
Edgewood, NY 11717  
Phone: 631.789.5000  
Fax: 631.789.5063  
Toll Free: 888.844.4720  
sales@tiitech.com

[www.tiitech.com](http://www.tiitech.com)

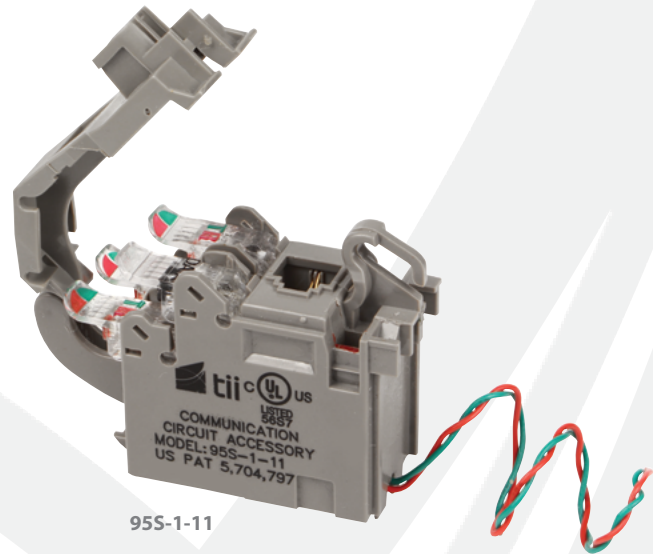


The 95S Series ADSL POTS Splitter Module splits the combined voice and data signals carried on telephone lines to provide separate outputs for phone and data services. The 95S-1-11 utilizes enhanced circuit components to meet ADSL2+ services for IPTV requirements.

#### KEY PRODUCT BENEFITS

- ▶ Module's unique design provides customer bridging and ADSL POTS splitting all in one module.
- ▶ Module easily snaps in and out of the customer side of the NID and occupies only one position, thereby not compromising the NID's overall capacity
- ▶ Designed for use in a wide variety of Network Interface Devices (NIDs) at the customer premises. Compatible with Tii 3600, Tii 3700, Tii 5100 and Tii 9600 NID footprints
- ▶ The Tii splitter design makes it possible to use a single phone line to provide triple play services including ADSL2+ and IPTV
- ▶ With module installed, an additional standard POTS line module is not needed
- ▶ Module includes Tii's unique patented switchable RJ-11 Jack (Auto-Jack®). The Auto-Jack® does not require an RJ-11 plug for normal operation and delivers unparalleled reliability
- ▶ When engaged, the Tii Auto-Jack® connects the RJ-11 test plug contacts to the central office (CO) for dial tone validation while disconnecting the customer from the circuit
- ▶ Auto-Jack® assembly includes a sealed test point access feature, which allows the craft to test subscriber wiring even while a test plug is mated into the Auto-Jack® receptacle. This greatly facilitates the testing process
- ▶ Standard features such as customer locking/telco bypass, and hinged covers become available when installed in a tii Network Interface Device

#### INDUSTRY STANDARDS

- ▶ ANSI T1.424 Compliant
- ▶ Auto-Jack® RJ-11 unit exceeds Telcordia GR-49 CORE requirements for severe climatic conditions, both first and second level lightning surge requirements in the open and short circuit mode
- ▶ Compliant to GR49, GR1089, GR3167, TR-NWT-001195
- ▶ Listed To UL1863

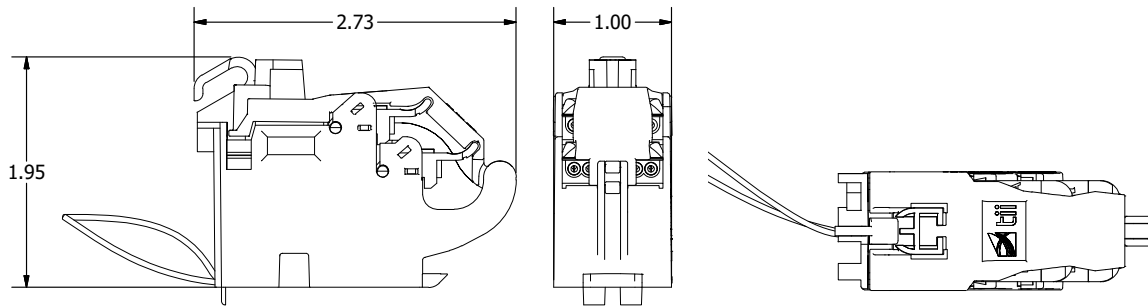

Dimensions are in Inches

## SPECIFICATIONS

### Electrical (Complies with ANSI T1.424 Issue 2 Annex E)

DC Loop Current	0 to 100 mA
DC Loop Voltage (tip-to-ring)	0 to -60Vdc
Ringing Signals	103 Vrms superimposed on the DC Loop Voltage; 20 - 30 Hz
DC Resistance	< 20 ohms, POTS tip-to-ring with Line port (U-R) shorted
Insertion Loss (Short & Long Loop)	≤ 0.5 dB
Tip-to-Ring Capacitance, POTS port	20 ≤ C ≤ 100 nF; 20 - 30 Hz
Input Impedance (Measured Level)	≤ 0.25 dB; 30 - 2200 kHz, ZTr = 600
Attenuation Distortion (Voice Band), Increase relative to Insertion Loss at 1004 Hz	+0.7 to -0.5dB; 200 - 3.4 kHz, short loop, ZTc = 900, ZTr = 600 +0.7 to -0.5dB; 3.4 - 4.0 kHz, short loop, ZTc = 900, ZTr = 600 +0.4 to -0.5dB; 200 - 3.4 kHz, long loop, ZTc = 900, ZTr = 600 +0.5 to -0.5dB; 3.4 - 4.0 kHz, long loop, ZTc = 900, ZTr = 600
Delay Distortion (Voice Band)	< 25μs
Return Loss (Voice Band) (Short & Long Loop)	> 7 dB
Longitudinal Balance, Two Port Technique, DSL to Line Port (U - R) and Line Port (U - R) to POTS	> 60 dB; 30 - 1100 kHz > 55 dB; 1100 - 2200 kHz
Capacitance to Ground, POTS Port	≤ 1.0 nF; 20 - 30 Hz
ADSL2+ Band Attenuation	> 65 dB; 30 - 2200 kHz
DC Current Influence (Ring Trip)	< 2% up to 300 mA
Intermodulation Distortion (MTPR)	30 - 2200 kHz > 50 dB

### Environmental

Lightning Surge	GR-1089 CORE Level 1 and Level 2 Surge
Power Cross	GR-1089 CORE First and Second Level AC Power Fault Immunity
Operating Temperature	-40 to +65 °C (-40 to 149 °F)
Relative Humidity	0 to 95%, non-condensing

## ORDERING INFORMATION

Model No.	Description	Standard Pkg.
95S-1-11	ADSL POTS Splitter with Wire Leads	40 Pieces, 0.14 lbs. each
95S-1-11-1	ADSL POTS Splitter with Wire Leads and #10 Terminal Lugs	