### 24 Series

# Indoor Building Entrance Terminal

**CPE/Premise Wiring** 

Headend/CO

MDU

Utility/Municipality

Wireless



At the point of demarcation, Building Entrance Terminals (BETs), safeguard communication equipment from damaging electrical surges that may get onto incoming lines.

#### **KEY PRODUCT BENEFITS**

- Available in 25, 50 and 100 pair counts
- ► Terminations: 110, 710 or MS2 input; 110 output
- Industry standard 5-pin protector field sealed to protect from moisture and corrosion
- Available with gas tube module 175-3C1EW-NL factory installed
- Splice chamber for input cable
- Cover included
- Compact footprint
- Steel construction
- Manufactured from 18 gauge, epoxy powder coated steel

#### **INDUSTRY STANDARDS**

- ▶ UL 497 Listed for primary and secondary protection
- ► Telcordia GR-937/GR-2916




Corporate Headquarters: 141 Rodeo Drive

Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063

Toll Free: 888.844.4720 sales@tiitech.com

## **24 Series BETs**

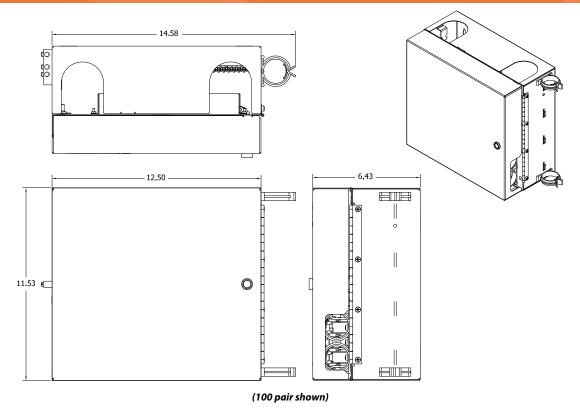

Dimensions are in Inches

Pair Count	Dimensions (height x width x depth) 6.75" x 14.58" x 6.39" (17.15 cm x 37.03 cm x 16.23 cm)			
25 Pair				
50 Pair	6.75" x 14.58" x 6.39" (17.15 cm x 37.03 cm x 16.23 cm)			
100 Pair	11.53" x 14.58" x 6.43" (29.79 cm x 20.32 cm x 16.33 cm)			

#### **Operating Temperature**

-13°F to 149°F (-25°C to 65°C)

#### **ORDERING INFORMATION**

Model #	Pair Count	Input	Output	<b>Protectors Installed</b>	Cover
24025-110-M110C	25	110	110	No	Yes
24025-110-M110PC	25	110	110	Yes	Yes
24025-710-M110C	25	710	110	No	Yes
24025-MS2-M110C	25	MS2	110	No	Yes
24050-110-M110C	50	110	110	No	Yes
24050-110-M110PC	50	110	110	Yes	Yes
24050-710-M110C	50	710	110	No	Yes
24050-MS2-M110C	50	MS2	110	No	Yes
24100-110-M110C	100	110	110	No	Yes
24100-110-M110PC	100	110	110	Yes	Yes
24100-710-M110C	100	710	110	No	Yes
24100-MS2-M110C	100	MS2	110	No	Yes

Units with protectors installed have Model # 175-3C1EW-NL