

372S-4G Series

Gigabit Ethernet Surge Protection Module

CPE/Premise Wiring

Data Center

MDU

Utility/Municipality

Wireless




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

www.tiitech.com

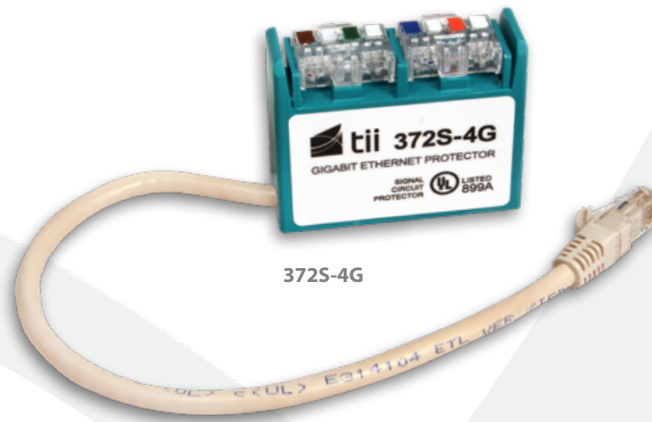

372S-4G



372S-4G-IDC

The 372S-4G Gigabit Ethernet Surge Protection Module is designed to provide state-of-the-art protection for high speed networks or similar low-voltage, data networks.


KEY PRODUCT BENEFITS

- ▶ CAT6, 10/10/1000BaseT up to 1 Gbps
- ▶ Terminations are made by means of convenient rockers and Insulation Displacement Contacts (IDC)
- ▶ Available with RJ-45 male pigtail or sealed IDC pigtail
- ▶ Uses multiple three-electrode gas tubes for primary protection
- ▶ Gas discharge tube shunts large overvoltage/overcurrent transients to Ground; protecting sensitive equipment
- ▶ Protection elements are encapsulated to protect them from any environmental factors that can adversely affect the performance of the protector
- ▶ Compatible with Power Over Ethernet (PoE)
- ▶ Available installed in an outdoor rated weather resistant enclosure

INDUSTRY STANDARDS

- ▶ Listed to UL 497 as a primary surge protector
- ▶ Meets Telcordia GR-1361-CORE, TR-NWT-000975 and TR-NWT-001305

372S-4G Series

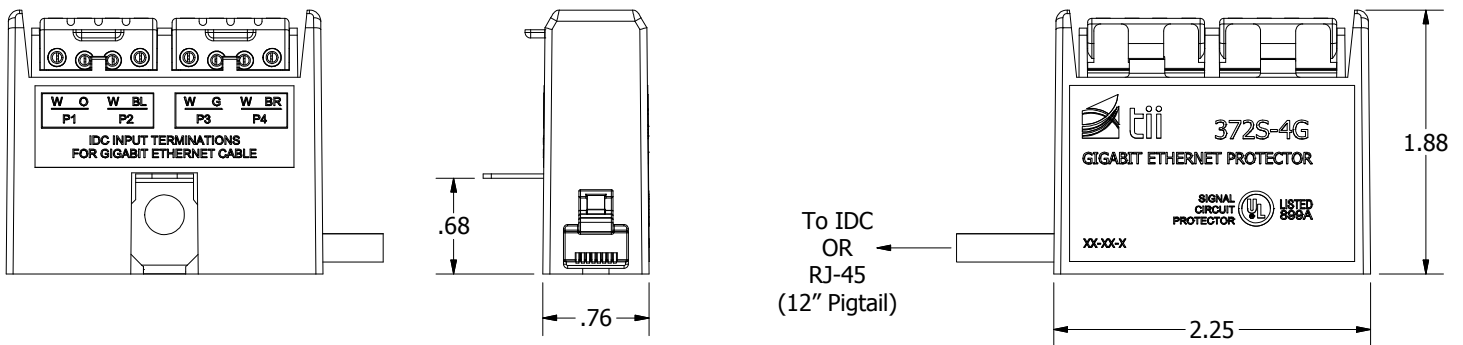

Dimensions are in Inches

Electrical

Interfaces	CAT6 compatible 10/100/1000BaseT
Data Rate	1 Gbps
Capacitance	< 2pF
Insertion Loss (0.5 – 100MHz)	< 1dB
Power Over Ethernet	60V DC, 750mA per pair

Surge Protection

Surge Protection	All four wire pairs protected with balanced GDTs
Response Time	< 2uS
DC Breakdown	230V Nominal
Impulse Breakdown 100V/uS	400V max.
Max Impulse Current 8/20u	20kA, 10kA each side simultaneously

Impulse Life:

10 Amp, 10/1000µS	1500 Surges
100 Amp, 10/1000µS	100 Surges
300 Amp, 10/1000µS	50 Surges

AC Discharge Current

10 Amp, 1 Second	5 Operations
1 Amp, 1 Second	60 Operations

Environmental

Operating Temp	-40° C to +60° C
Humidity	100% non-condensing

ORDERING INFORMATION

Model No.	Description	Standard Pkg.
372S-4G	Gigabit Ethernet Surge Protection Module with RJ-45 Pigtail	50 pieces - 0.175 lbs. each
372S-4G-IDC	Gigabit Ethernet Surge Protection Module with Sealed IDC Pigtail	

INSTALLED IN OUTDOOR RATED ENCLOSURE

Model No.	Description
372S-4G-IDC-1	Gigabit Ethernet Surge Protection Module with Sealed IDC Pigtail Installed in Outdoor Rated Enclosure



INFORMATION CONTAINED IN THIS PUBLICATION IS PROVIDED ONLY FOR YOUR CONVENIENCE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. TII TECHNOLOGIES MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE; AND TII TECHNOLOGIES DISCLAIMS ALL LIABILITY ARISING FROM THE USE OF THIS INFORMATION.