

P399

100 Pair Wire-Wrap Connector Block

CPE/Premise Wiring

Headend/CO

Utility/Municipality



P399-WW-24-025

The P399 is a 100-pair protector/connector block that utilizes industry standard 5-pin protector modules and wire-wrap terminations. The P399 protects personnel and expensive equipment from damaging electrical surges that may get onto incoming cable lines. It mounts onto conventional central office frames with 8 inch centers. Sold in pairs, stubbed only.

KEY PRODUCT BENEFITS

- ▶ For use on central office or distribution frames
- ▶ Accepts industry standard 5-Pin protector modules
- ▶ Compact, lightweight design saves space and increases number of protected pairs per frame vertical
- ▶ Gold plated protector module sockets and test field contacts for superior electrical contact eliminating noise problems.
- ▶ Fanning strips allow easy wire management for both field stubbing and cross connection to horizontal blocks
- ▶ 100-pair front-facing test field
- ▶ Front ground test point offers labor savings and reliability
- ▶ Swivel stub bracket allows for top down or bottom up stub direction
- ▶ Custom connectorization available

INDUSTRY STANDARDS

- ▶ Telcordia GR-2916 Compliant
- ▶ Telcordia TA-EOP-000164 Compliant
- ▶ UL 497 Compliant



Tii Technologies Inc.

Corporate Headquarters:


141 Rodeo Drive
Edgewood, NY 11717

Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

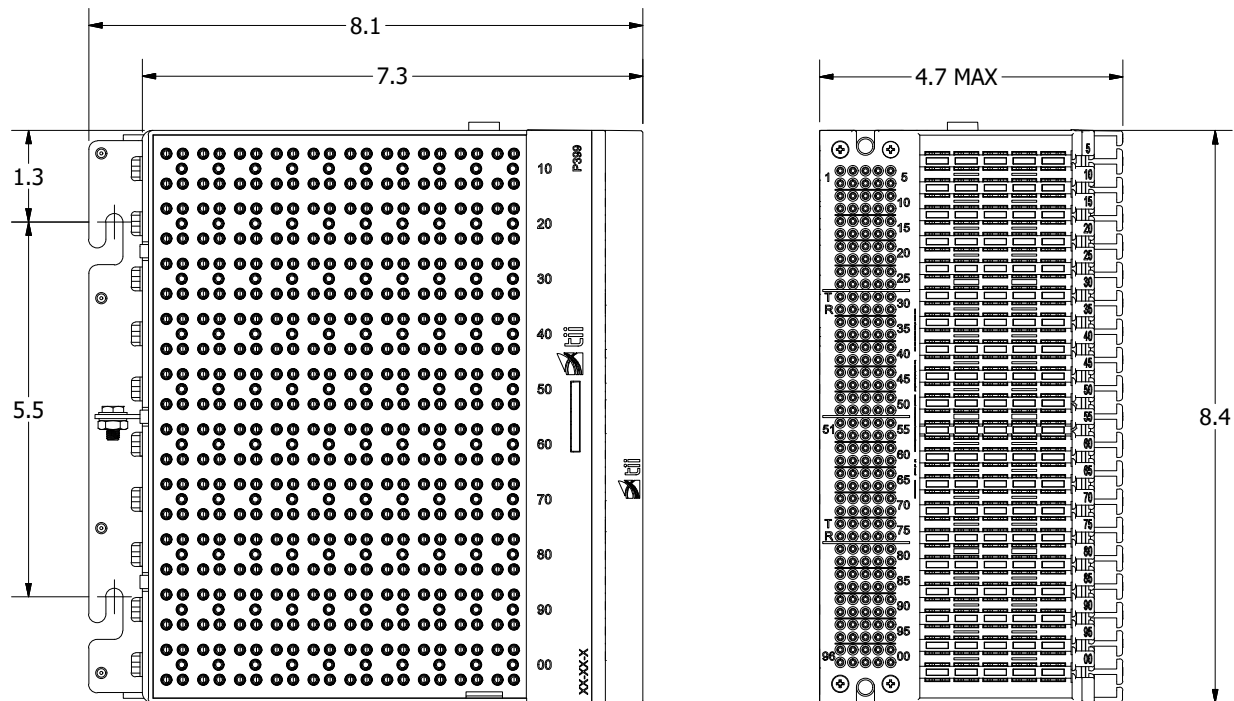

Dimensions are in Inches

SPECIFICATIONS

Operating Temperature	-13°F to 149°F (-25°C to 65°C)
Dimensions (height x width x depth)	8.5" x 4.5" x 7.5" (22 cm x 12 cm x 19 cm)

Meets or exceeds specifications Listed to UL 497 and those set forth in Telcordia GR-2916 and Telcordia TA-EOP-000164

ORDERING INFORMATION

Model No.	Pair Count	Description
P399-WW-24-nn*	100	Wire-Wrap Terminations and Factory Stubbed

*nn = length of cable (required) in feet. (For Example: P399-WW-24-50)

Sold stubbed only in even number quantities (for testing purposes).