

RM2U4B Series

Rackmount Fiber Distribution Panel

CPE/Premise Wiring

Data Center

DOT

FTTP

MDU

PON

Utility / Municipality

Wireless



RM2U4B024RSA9

The RM2U4B is a 2 RU, 4 termination panel rack mount fiber distribution unit designed to support both patching and splicing in one unit. The enclosure has a slide out master panel that allows for easy access of terminations, fiber management and splicing.

KEY PRODUCT BENEFITS

- ▶ Accommodates Up to 48 Fiber Ports
- ▶ Available with Various Fiber Termination Connectors
- ▶ Available with factory loaded adapter plates, splice trays and pigtails
- ▶ 19 or 23" rack mountable
- ▶ Slide out master tray, front or rear
- ▶ Multiple tie down points for buffer tubes and overall cable management
- ▶ Fanout kit securing points
- ▶ LGX compatible adapter plates or MTP modules
- ▶ Universal cable entry kit
- ▶ Up to 4 adapter plates or MTP modules
- ▶ Optional Key Lock installed




Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

RM2U4B Series

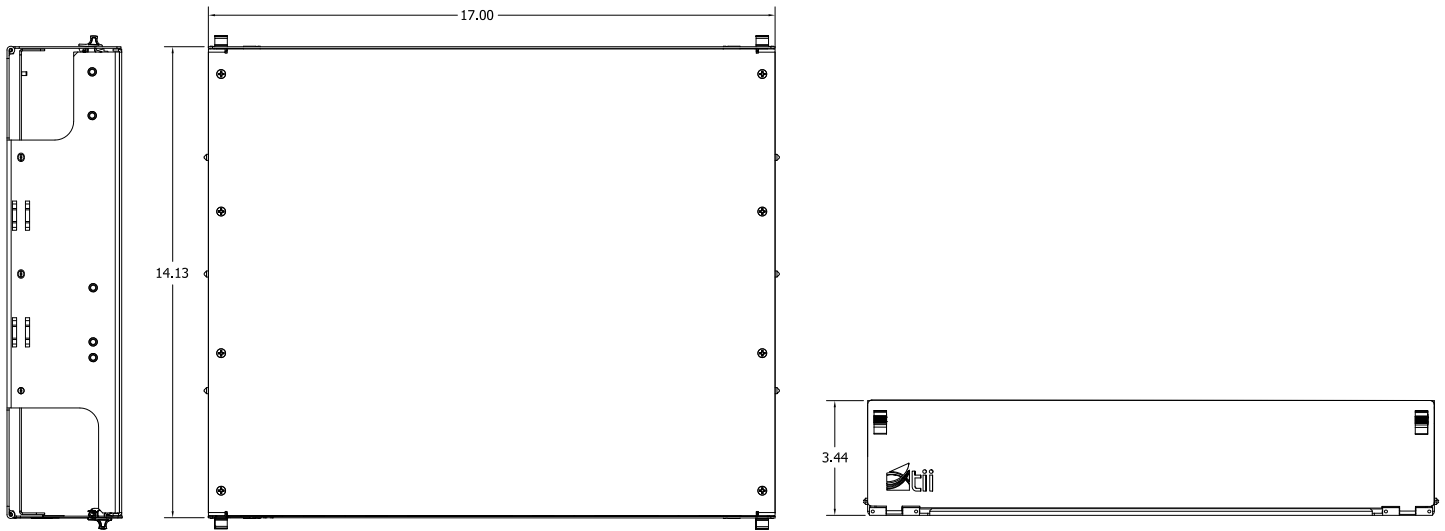

Dimensions are in Inches

MODEL NUMBER MATRIX

RM2U4B	XXX	X	XX	X
	Fiber Ports	Fiber Type	Adapter	Pigtails & Splice Trays
	024	R = Singlemode	FC = FC	N = None
	048	K = MM62.5 OM1	FA = FC APC	9 = 900um
		C = MM50 OM2	LC = LC	5 = 250um
		S = MM50 OM3	SC = SC	R = 12 Fiber Ribbon
			SA = SC APC	
			ST = ST	

SPECIFICATIONS

Model #	Description
Adapter Plates	4
Splice Trays	2
Protrusion	4.25"
Dimensions	3.4" H x 17.0" W x 14.1" D
Packaging	6" H x 20" W x 17" D
Weight	8 lbs empty, 11 lbs typical loaded
Material	0.06" Aluminum, Black powder coat

ACCESSORIES

Model #	Description
RM-SPL-BKT-2	Bracket 2 Splice Tray Capacity
FST-ASF24	Splice Tray 24 Fiber Single Fusion
LG1-xxxxxx-B	LG1 series adapter plates in black (See LG1 product guide)
RM-FM-2/3U	Flush mount extended rackmount ears, supports 2U & 3U panels (set of 2)