SHL Series

TSL Preterminated Stubbed Housings

Data Center


 FTTx

MDU

PON

Utility/Municipality

Wireless

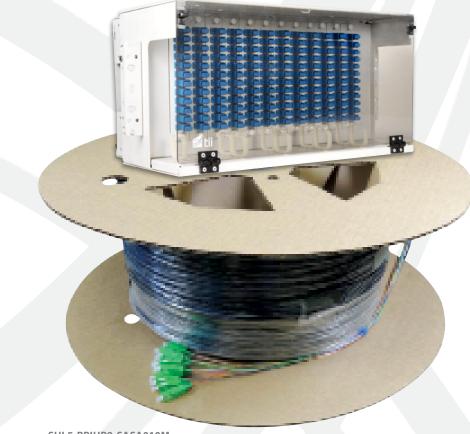

SHL5-RPIUR8-SASA010M



Corporate Headquarters:

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com Rackmount fiber distribution frames factory loaded with custom made fiber cable assembly.

KEY PRODUCT BENEFITS

- Accommodates up to 144 fiber ports
- Factory loaded with custom length fiber assemblies
- > 19" or 23" rack mountable
- ► LGX® compatible

SHL Series

SPECIFICATIONS

Typical Port Options	72	96	144
Rack Units (RU)	4	4	5
Dimensions (LxWxH) (in.)	11 x 17 x 7.0	11 x 17 x 7.0	11 x 17 x 8.75
Packaging Dim. (in.)*	20 x 20 x 15	20 x 20 x 15	20 x 20 x 15
Shipping Weight (lbs.)*	40	45	55

^{*} Estimated shipping size and weight based on 100ft of non-armored cable.

ORDERING INFORMATION

SHL	X	-X	X	X	X	X	X	-XX	XX	XXX	X
	Chassis	Fiber Mode	# of Fibers	Cable Type	Fiber Type	Rating	Jacket Color	Chassis End	Loose End	Length	иом
	4 - 4 RU 7"	R - Singlemode	L - 72	D - Indoor Distr.	5 - 250um	R - Riser	2 - Orange	FC - FC	FC - FC	3 Digit	F - Feet
	5 - 5 RU 9"	K - MM62.5 OM1	N - 96	I - Indoor/Outdoor	U - Tight Buffer	P - Plenum	8 - Black	FA - FC APC	FA - FC APC	e.g. 001	M - Meters
		C - MM50 OM2	P - 144	L - Loose tube OSP	B - Ribbon	N - None OSP	9 - Yellow	LC - LC	LC - LC		
		S - MM50 OM3		R - Ribbon			A - Aqua	SC - SC	SC - SC		
								SA - SC APC	SA - SC APC		
								ST - ST	ST - ST		
									NA - Pigtail		