HCCP-LC Series

Modular Fiber Patch & Splice Enclosure

CPE/Premise Wiring

FTTx

MDU

PON

Utility/Municipality

tii

Tii Technologies Inc.
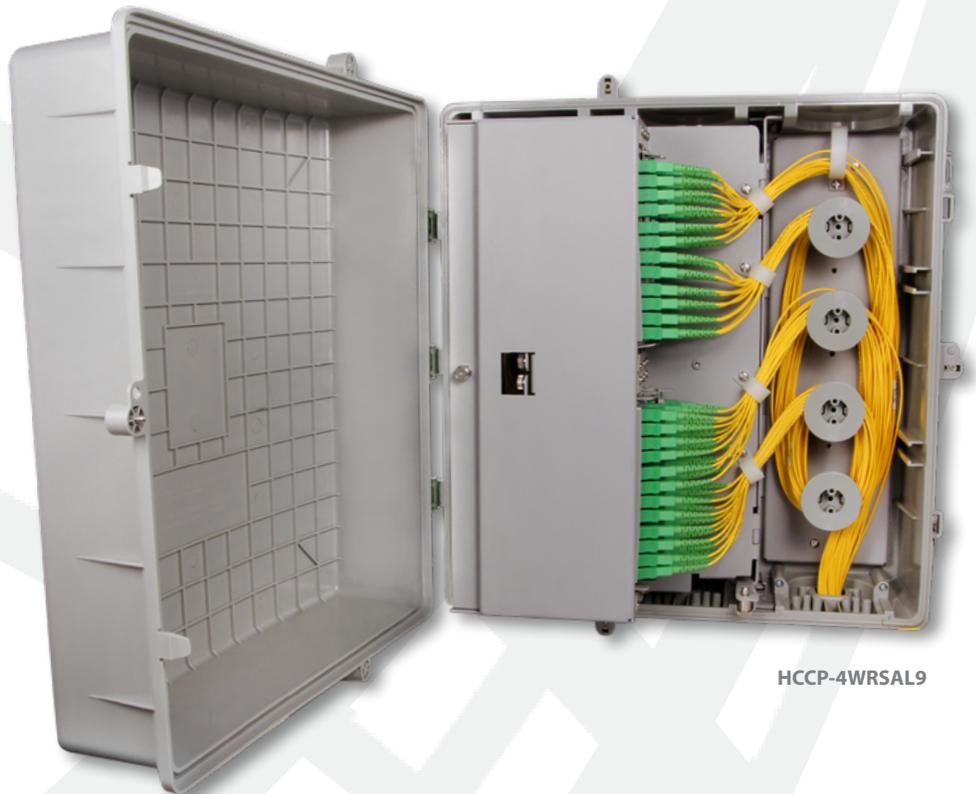
Corporate Headquarters:
141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

HCCP-4WRSAL9

Hybrid Connectivity Closure is a weatherproof family of plastic enclosures for indoor and outdoor use that can be wall or pole mounted. The HCCP is configured as a high density modular cassette patch and splice solution for up to 144 customer service drops. Flexible design and options support a wide range of deployment styles including fusion splicing and field termination.
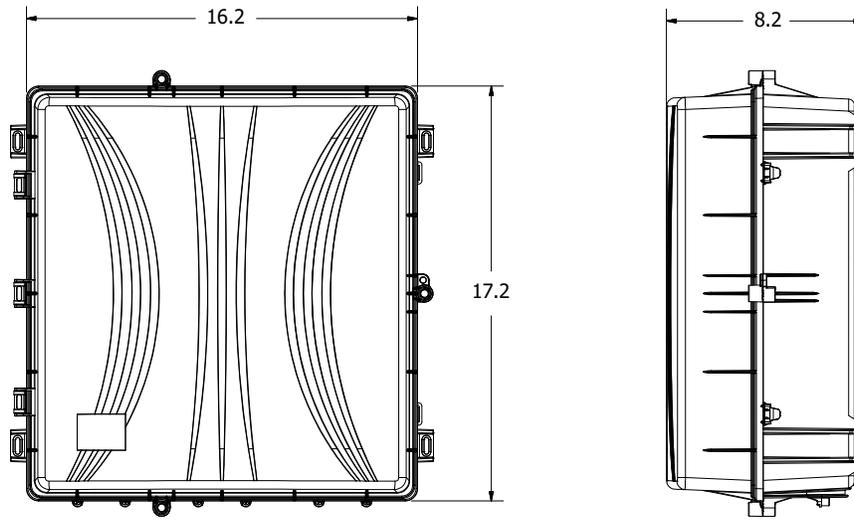
KEY PRODUCT BENEFITS

▶ 144 LC fiber distribution

▶ Modular patch & splice cassettes for added flexibility

▶ Swing away patch ports hold 6 modules

▶ Express cable with extra splicing capacity

▶ Mid-span cable access

▶ Multiple cable entry/exit modules for exact fit cable and conduit up to 1.5"

▶ Pole and wall mount

▶ Adjustable and fixed skirt options

INDUSTRY STANDARDS

▶ NEMA-4, IP-66

▶ UL-2416

▶ GR-3123, GR-326

16.2

8.2

17.2

Dimensions are in Inches

SPECIFICATIONS

Patch & Splice Cassettes or Plates	Up to 6
FST Splice Trays	Up to 4
Cable Entry Modules	3 bottom, optional 3 top
Dimensions (H x W x D)	18" x 17" x 8.2"
Packaging	26" x 23" x 12"
Shipping Weight (Typical)	25 lbs.

ORDERING INFORMATION

HCCP	X	X	X	XX	X	X	X
	Cable Ports	**Mounting Style**	**Fiber Type**	**Adapter Type**	**Distr. Count**	**Distribution Style**	**Splice Trays 24SF/72MF**
	3 = Bottom Standard (NEMA 3)	W = Wall	R = SM G.657A1	LA = LC-APC	F = 24	C = Cassette Adapter only	0 - 4*
	4 = Bottom Conduit (NEMA 4)	P = Pole or Wall	N = SM G.657A2	LC = LC-UPC	J = 48	R = Cassette Ribbon Pigtail	
	A = Top/Bottom Standard (NEMA 3)		Z = SM G.657B3		L = 72		
	C = Top/Bottom Conduit (NEMA 3)				N = 96		
					P = 144		

* Feeder and distributor splicing is done inside cassettes, these trays are for express tables

R3

ORDERING INFORMATION - INDIVIDUAL ITEMS / ACCESSORIES

BASE MODULE

Model No.	Description
HCCP3	HCC Bottom Entry NEMA 3 for Indoor Use Rubber and Split Grommets
HCCP4	HCC Bottom Entry NEMA 4 for Indoor and Outdoor Use Conduit
HCCPA	HCC Top/Bottom Entry NEMA 3 for Indoor Use Rubber and Split Grommets
HCCPC	HCC Top/Bottom Entry NEMA 3 for Indoor Use Conduit

CASSETTES AND ADAPTER PLATES

Model No.	Description
HPC-24RLAR	Patch & Splice Cassette 24 Fiber LC-APC Ribbon
HPC-24RLCR	Patch & Splice Cassette 24 Fiber LC-UPC Ribbon
HPC-24RLAN	Patch Cassette 24 LC-APC Adapters only (no pigtails)
HPC-24RLCN	Patch Cassette 24 LC-UPC Adapters (no pigtails)

OTHER ACCESSORIES

Model No.	Description
FST-AUNIV	Splice Tray 24 Single / 6 Mass Fusion
FSK-HCC	Skirt Fixed 25"
ASK-HCC	Skirt Adjustable 25 – 51 Inch
PMB-HCC	Pole Mount Bracket Kit
HCCE-PORT	Cable Entry Split 3-Piece with Grommet
HCCN-GROM	Cable Entry Conduit ¾, 1, 1.5 Inch with Cone
HCCR-GROM	Cable Entry Rubber Grommet

Note: *Other options and accessories are also available - please contact Tii customer service.*