## **SHW Series**

Stubbed Fiber Distribution Wallmount Enclosure

**CPE/Premise Wiring** 

**FTTx** 


MDU

Utility/Municipality



Corporate Headquarters:

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com

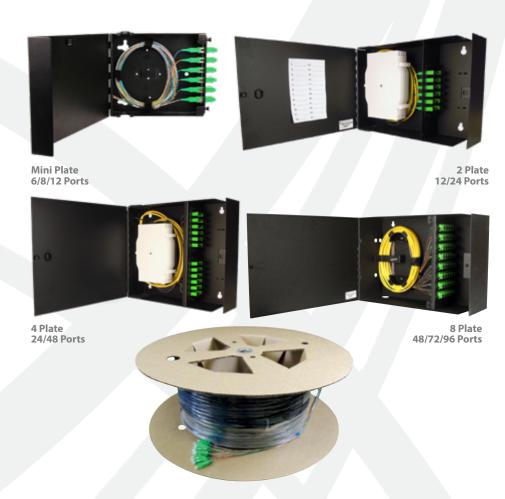

The Stubbed Housing Wallmount (SHW) Series allows for flexible deployment and simplified future expansion utilizing plug and play configurations, including a combination of fusing splicing and preterminated cable assemblies.

### **KEY PRODUCT BENEFITS**

- Plug and play
- Suitable for loose tube, tight buffer and ribbon cable
- Available with Factory terminated cable stub

### **INDUSTRY STANDARDS**

- Meets GR-771 requirements
- ► NEMA-2 Compliance

# **SHW Series**

### **SPECIFICATIONS**

	Mini Plate	2 Plate	3 Plate	4 Plate		
Typical Port Options	6/8/12	12/24	24/48	48/72/96		
Rack Units (RU)	1	2	3	4		
Dimensions (LxWxH) (in.)	6.3 x 5.5 x 1.6	13 x 9.5 x 3.5	13 x 11.5 x 3.5	20 x 16 x 6		
Packaging Dim. (in.)*	20 x 20 x 6	20 x 20 x 15	20 x 20 x 15	20 x 20 x 20		
Shipping Weight (lbs.)*	10	15	25	40		

<sup>\*</sup> Estimated shipping size and weight based on 100 ft of non-armored indoor distribution 900um tight buffer cable.

### **CUSTOM MODEL NUMBER MATRIX**

SHW	X	-X	X	X	X	X	X	-XX	XX	XXX	X	-X
	Encloure Style	Fiber Mode	# of Fibers	Cable Type	Fiber Type	Rating	Jacket Color	Enclosure End	Loose End	Length	UOM	Options
	1 = 1 Plate Mini	R = Singlemode	6=6	C = SST Flat Drop (1-12F)	5 = 250um	R = Riser	2 = Orange	FC = FC	FC = FC	3 Digit	F = Feet	T = 12 Fiber
	2 = 2 Plate	K = MM62.5 OM1	B = 12	D = Indoor Distr.	9 = 900um (<=24)	P = Plenum	8 = Black	FA = FC APC	FA = FC APC	e.g. 001	M = Meters	Splice Tray
	3 = 3 Plate	C = MM50 OM2	F = 24	I = Indoor/Outdoor	U = 900um (>24)	N = None OSP	9 = Yellow	LC = LC	LC = LC			
	4 = 4 Plate	S = MM50 OM3	J = 48	L = Loose Tube OSP	B = Ribbon		A = Aqua	SC = SC	SC = SC			
			L = 72	R = Ribbon				SA = SCAPC	SA = SC APC			
			N = 96					ST = ST	ST = ST			
									NA = Pigtail			