WM4PBF Series

Wall Mount
Patch & Splice
Fiber Enclosure

CPE/Premise Wiring

FTTP

MDU



Corporate Headquarters:

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com




WM4PBF024RSA9


Wall mount fiber distribution unit designed to support patching and splicing in one unit. The enclosure has 4 adapter panel positions, allowing for a wide variety of fiber termination connector types. Two compartments separate the network terminations from the distribution terminations, and the unit has a single outer door with optional key lock.

KEY PRODUCT BENEFITS

- Accommodates up to 48 fiber ports
- Available with factory loaded adapter plates, splice trays and pigtails
- Suitable for loose tube, tight buffer and ribbon cable
- Cable entry tie down points
- ► Single door with optional key lock available
- Top or bottom cable entry
- LGX® compatible adapter plates

WM4PBF Series

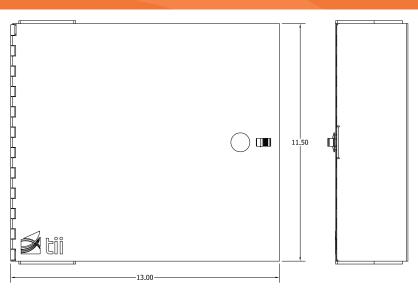



Dimensions are in Inches

MODEL NUMBER MATRIX

WM4PBF	XXX	X	XX	X	X
	Fiber Ports	Fiber Type	Adapter	Pigtails & Splice Trays	Key Lock
	012	R = Singlemode	FC = FC	N = None	L
	024	K = MM62.5 OM1	FA = FC APC	5 = 250um	
	036	C = MM50 OM2	LC = LC	9 = 900um	
	048	S = MM50 OM3	SC = SC	R = 12 Fiber Ribbon	
			SA = SC APC		
			ST = ST		
			TP = MTP		

SPECIFICATIONS

Model #	Description
Adapter Plates	4
Splice Trays	4
Dimensions	11.5" H x 13" W x 3.5" D
Packaging	12" H x 14" W x 4" D
Weight	8 lbs. empty, 11 lbs. typical loaded
Material	18 GA Steel, Black powder coat

ORDERING INFORMATION / ACCESSORIES

Model #	Description		
WM4PBF	Wallmount patch panel empty 4 LGX adapter plate capacity		
RM-SPL-BKT-4	Splice tray mounting bracket 4 tray capacity		
TRAY7	Splice tray 7 inch 12 fiber single fusion		
LG1 series adapter plates in black (See LG1 datasheet)			