WM8PBF Series

Wall Mount
Patch & Splice
Fiber Enclosure

CPE/Premise Wiring

FTTx

MDU



Corporate Headquarters:

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com




WM8PBF048RSA9

Wall mount fiber distribution unit designed to support patching and splicing in one unit. The enclosure has 8 adapter panel positions, allowing for a wide variety of fiber termination connector types. Two compartments separate the network terminations from the distribution terminations, and the unit has a single outer door with optional key lock.

KEY PRODUCT BENEFITS

- Accommodates up to 96 fiber ports
- Available with factory loaded adapter plates, splice trays and pigtails
- Suitable for loose tube, tight buffer and ribbon cable
- Cable entry tie down points
- Single door with optional key lock available
- Top or bottom cable entry
- LGX® compatible adapter plates

WM8PBF Series

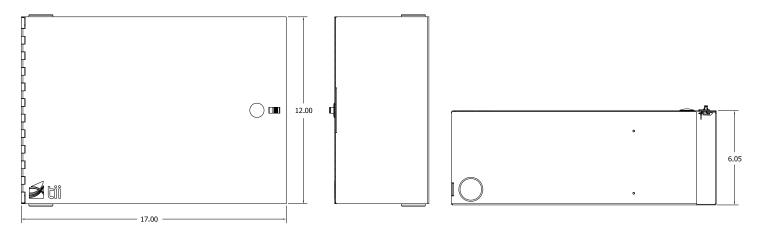

Dimensions are in Inches

MODEL NUMBER MATRIX

WM8PBF	XXX	X	XX	X	X
	Fiber Ports	Fiber Type	Adapter	Pigtails & Splice Trays	Key Lock
	048	R = Singlemode	FC = FC	N = None	L
	072	K = MM62.5 OM1	FA = FC APC	9 = 900um	
	096	C = MM50 OM2	LC = LC	R = 12 Fiber Ribbon	
		S = MM50 OM3	SC = SC		
			SA = SC APC		
			ST = ST		

SPECIFICATIONS

Model #	Description	
Adapter Plates	8	
Splice Trays	4	
Dimensions	17" H x 12" W x 6" D	
Packaging	20" H x 16"W x 11" D	
Weight	16 lbs. empty, 20 lbs. typical loaded	
Material	18 GA Steel, Black powder coat	

ORDERING INFORMATION / ACCESSORIES

Model #	Description	
WM8PBF	Wallmount patch panel empty 8 LGX adapter plate capacity	
RM-SPL-BKT-4	Splice tray mounting bracket 4 tray capacity	
TRAY7	Splice tray 7 inch 12 fiber single fusion	
LG1-xxxxxx-B	LG1 series adapter plates in black (See LG1 datasheet)	