

## **3800 Series**

### *COCOT Mounting Base*


CPE/Premise Wiring

DOT

MDU

Utility/Municipality

Wireless

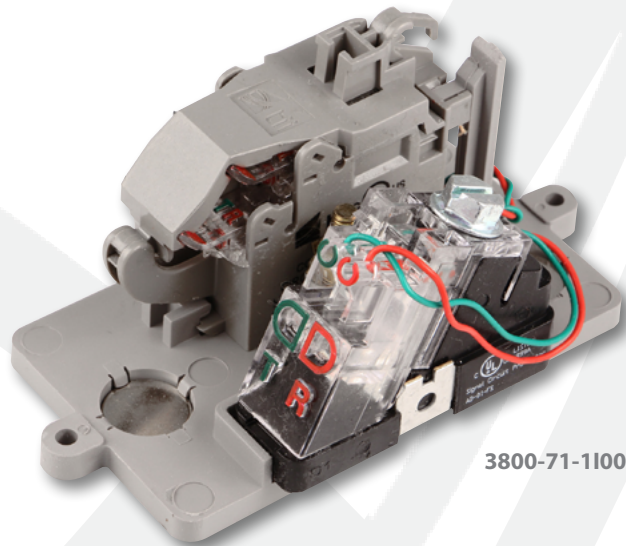

3800-71-1100

The 3800 COCOT (Customer Owned Coin Operated Telephone) Mounting Base provides single pair Network Interface Device (NID) capability on a rugged plastic base. The tii 3800 is ideally suited for COCOT and WiFi "Hot Spot" applications and can be magnetically or screw mounted.

#### **KEY PRODUCT BENEFITS**

- ▶ Small compact base accommodates a wide variety of tii Station Protectors and Customer Bridge Modules (CBM)
- ▶ Accommodates Tii's ADSL/POTS splitter modules making it ideal for pay telephone and public access internet WiFi "Hot Spots"
- ▶ Magnetic base for mounting to steel pedestal pay telephone equipment
- ▶ The station protector module is mounted and grounded to the 3800 by means of a conveniently located ground stud
- ▶ Optional CBMs include Tii's Auto-Jack® RJ-11 which is protected from the environment and requires no RJ-11 plug
- ▶ Each CBM accepts a standard RJ-11 plug for easy customer troubleshooting

#### **INDUSTRY STANDARDS**

- ▶ Protection modules exceed Telcordia GR-1361-CORE "Generic Requirements for Gas Tube Protectors" and Telcordia TR-NWT-000975 "Generic Requirements for Unprotected Terminal Blocks"
- ▶ Customer Bridge Module (CBM) meets Telcordia GR-1089-CORE "Normal and Severe Climatic" requirements for first and second level lightning surges
- ▶ Listed to UL 497 when installed with a Tii Primary Protector



**Tii Technologies Inc.**

**Corporate Headquarters:**

141 Rodeo Drive  
Edgewood, NY 11717



Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

# 3800 Series

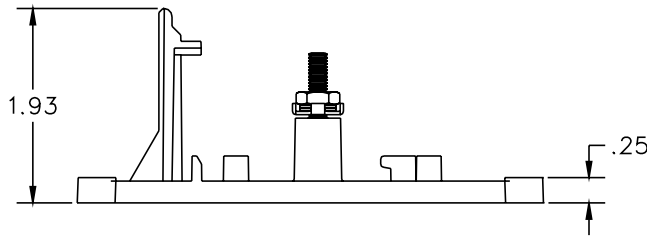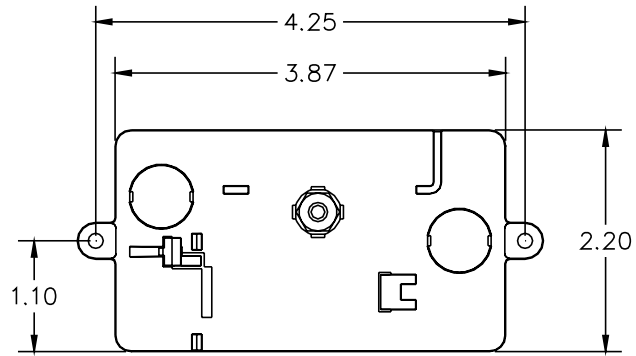

Dimensions are in Inches

## ORDERING INFORMATION

3800	-XX	-X	X	XX
Station Protectors		Customer Bridge Module		
		No. of CBMs	Wiring Type	Electronics
00 = None		0 = None	0 = None	00 = None
01 = 356L		1 = One	S = Insulated Screws	01 = 1/2 Ringer
03 = 356M1			I = IDC Terminations	09 = ADSL POTS Splitter
07 = 355M				10 = DSL Compliant 1/2 Ringer
15 = 126M				12 = VDSL2 POTS Splitter
17 = 126L1				14 = VDSL2 POTS Splitter with EMI Filter
22 = 122				18 = Combination 1/2 Ringer & RFI Filter
50 = 355MT				
51 = 127M				
52 = 372-S2				
53 = 356M2				
54 = 356M3				
71 = AD-01W-FS				
72 = AD-02W-FS				
73 = AD-M2-W-FS				
76 = AD-03W-FS				
78 = AD-01W-LP				
80 = ADX-L/R or W				

**Standard Pkg.** 20 pieces - 0.0938 lbs. (Base Only)