

763 Series

Six-Line Indoor/Outdoor Network Interface Devices

CPE/Premise Wiring

DOT

MDU

Utility/Municipality


Wireless



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000
Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

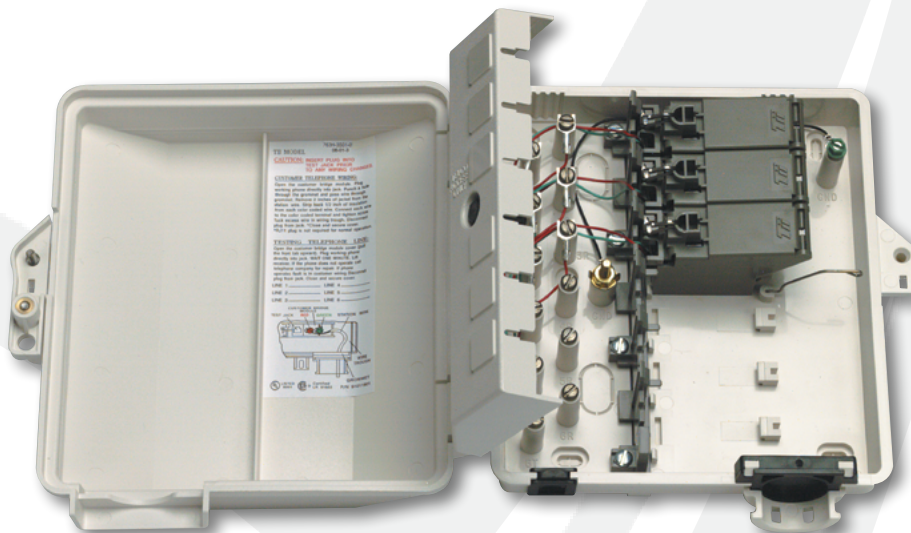

763H-3-S-01-0

The 763 is a highly durable, environmentally protected Six-Line Indoor/Outdoor Network Interface unit that features optional built-in electronics to meet a wide range of applications.


KEY PRODUCT BENEFITS

- ▶ The 763 is molded of high-impact thermoplastic material to provide exceptional durability
- ▶ A side-opening, hinged main cover closes with a Customer locking/Telco bypass security feature
- ▶ A restricted access telephone company compartment and a customer network interface compartment are located under the main cover
- ▶ Superior performing Customer Bridge Module includes Tii's Auto-Jack® RJ-11 which is protected from the environment, requires no RJ-11 plug, and exceeds Telcordia requirements for first and second level power surges, resulting in unsurpassed performance
- ▶ Customer connections are equipped with insulated screw terminals or optional gel sealed IDC terminations
- ▶ Each lockable Customer Bridge Module can accept a standard RJ-11 plug for customer troubleshooting, and easily snaps into place
- ▶ For special customer ground situations (such as party line service, coin phone), a ground termination point is located in the upper most position of the customer compartment
- ▶ The 763 is available with or without a 6' cable stub

INDUSTRY STANDARDS

- ▶ Tii's Customer Bridge Module exceeds Telcordia "Severe Climatic" requirements for first and second level lightning surges, resulting in unsurpassed performance.
- ▶ Meets Telcordia TR-NWT-000239
- ▶ Listed to UL 1863

763 Series

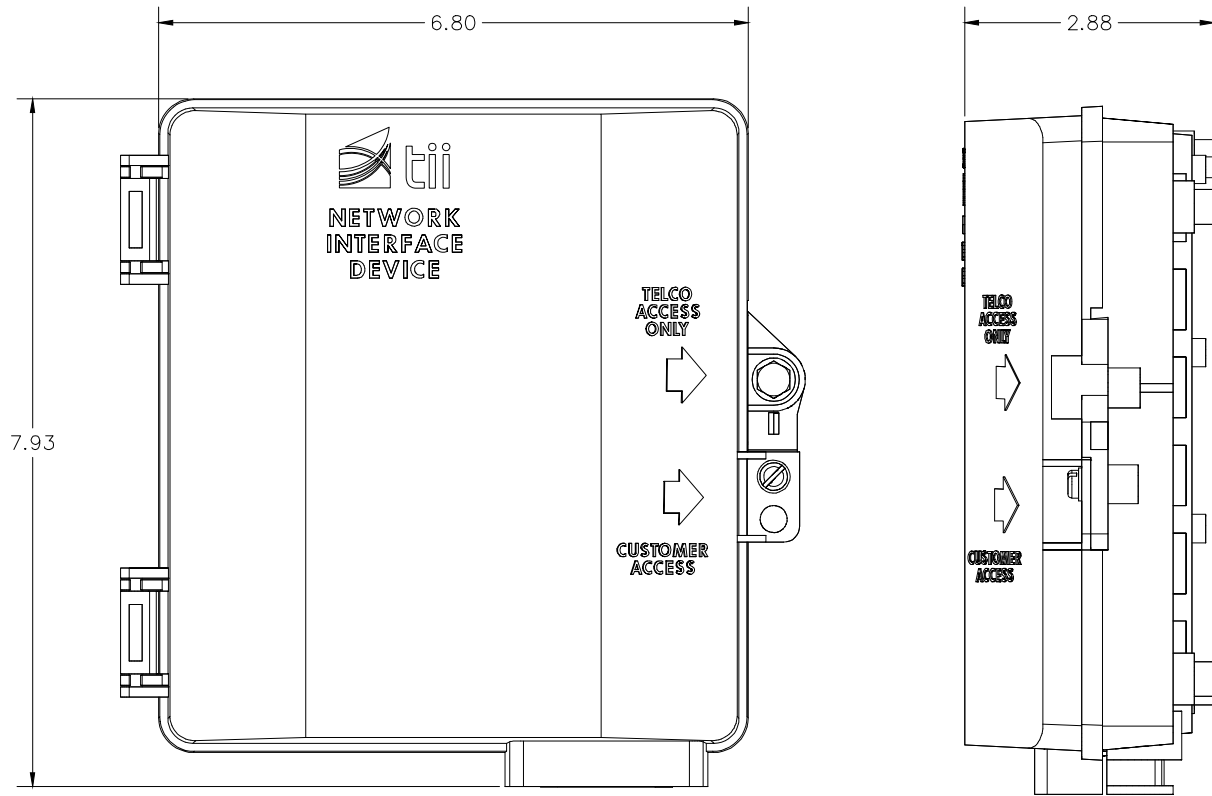

Dimensions are in Inches

ORDERING INFORMATION

763X	-X	-X	-XX	-X
	Customer Bridge Module			
Security Screw	No. of CBMs	Wiring Type	Electronics	Stub
H = Hex Head	0 = None	0 = None	00 = None	0 = None
P = Pin-In-Head	1 = One	S = Insulated Screws	01 = 1/2 Ringer	1 = With Stub
	2 = Two	I = IDC Terminations	09 = ADSL POTS Splitter	
	3 = Three		10 = DSL Compliant	
	4 = Four		1/2 Ringer	
	5 = Five		18 = Combination	
	6 = Six		1/2 Ringer & RFI Filter	

Standard Pkg. 20 pieces - 1.3 lbs. each (enclosure only)