173-73-Series

1-Pin and 5-Pin
Gas Tube
Protector Modules

CPE/Premise Wiring

Headend/CO

Utility/Municipality

Wireless



Corporate Headquarters:

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com



Tii gas tube modules are dependable plug-in devices that guard sensitive telecommunications systems from dangerous voltage surges. The gas tube utilizes a three-element design. This prevents destructive line-to-line over voltages, protecting PBXs and key systems in a way that conventional two-element gas tubes cannot.

The modules include heat activated fail-safe mechanism that provides additional protection against power crosses. Test points allow easy test access to the outside plant.


KEY PRODUCT BENEFITS

- Designed for line protection for sensitive voice and data equipment
- Balanced three-electrode design
- Extends equipment life
- Protects personnel

INDUSTRY STANDARDS

- Listed to UL 497 for Primary Protection
- Telcordia GR-974

173, 73 Gas Tube Protector Series

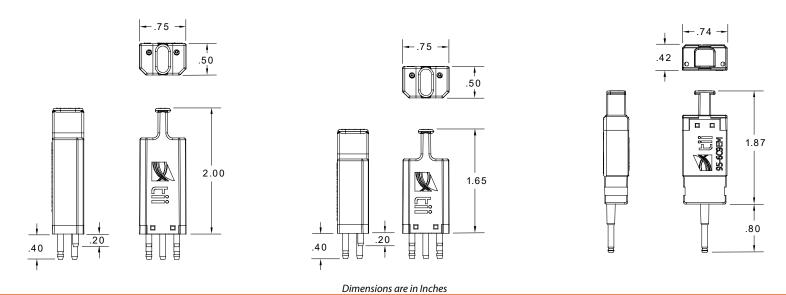

SPECIFICATIONS

	350 Volt	Test Parameters
DC Breakdown Voltage	280-420V	2000V/Sec max
Impulse Breakdown Voltage	<1000V	100V/μSec max
Capacitance	10 pF	1 MHz, 0 VDC
Fail-safe Operation	100 Sec @ 0.5A	
	50 Sec @ 1.0A	
	15 Sec @ 5.0A	
	10 Sec @ 20.0A	
Line Series Resistance	NA	Line in/ Line Out
Maximum Single Surge	24kA	8/20 μSec max
Insulation Resistance (minimum)	100ΜΩ	50 VDC
		100VDC
DC Holdover:		
52V	260mA	<150 mSec max
135V	200mA	to extinguish
150V	140mA	
Operating Temperature	-40° C to +65° C	

ORDERING INFORMATION

Model No.	Description
73-3C3EW-N	350V, Single Pin Protector Module with Red Body with Test Points
173-3C3EW-N	350V, 5-Pin Protector Module with 1.65" Red Body with Test Points
173-3C3EW-NL	350V, 5-Pin Protector Module with 2" Red Body with Test Points
173-3B3EW-N	350V, 5-Pin Protector Module with 1.65" Red Body without Test Points
173-3B3EW-NL	350V, 5-Pin Protector Module with 2" Red Body without Test Points

^{*} Remove (-N) for Gold Pins.