

PROTECTOR PACKS

506, 1506 Series

6 Pair, 5-Pin Building Entrance Protector Packs



CPE/Premise Wiring

DOT

MDU

PON

Utility/Municipality

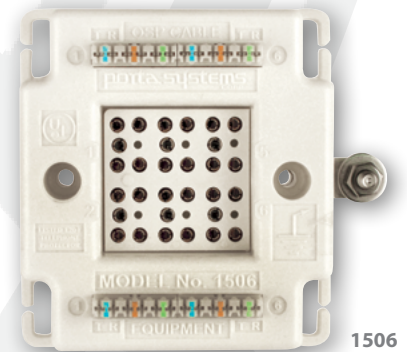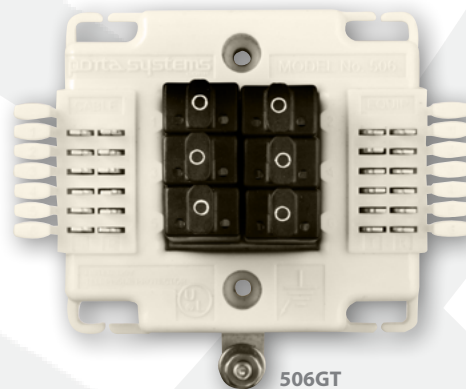

This six-pair, five-pin protector pack series is UL listed for primary/secondary protection and suitable for use at the customer premise demarcation point. Also used for runs between buildings in an industrial, commercial, or campus environment to protect communication networks.

KEY PRODUCT BENEFITS

- ▶ Utilizes industry standard 5-pin protector modules
- ▶ 506 features 66 IDC termination input/output
- ▶ 1506 features 110 IDC termination input/output
- ▶ High-impact, flame retardant thermoplastic
- ▶ Units can be cascaded to provide for expansion
- ▶ Compact, lightweight design

INDUSTRY STANDARDS

- ▶ UL 497 Listed for primary protection
- ▶ UL 497A & 497B Listed for secondary protection



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717

Phone: 631.789.5000


Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

www.tiitech.com

506, 1506 Series

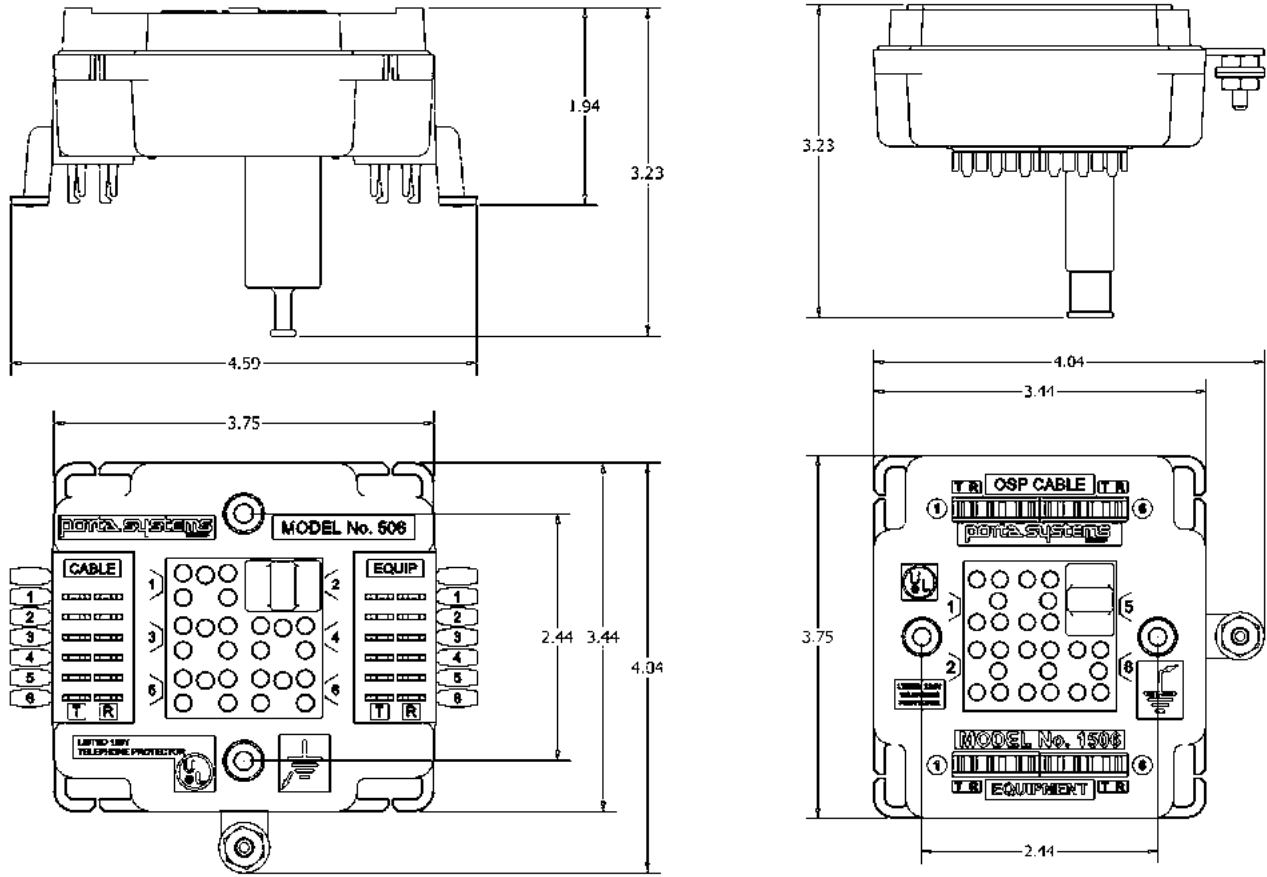

Dimensions are in inches

SPECIFICATIONS

	Dimensions (height x width x depth)	Weight (approx.)
506	4" x 4.6" x 3.3" (10 cm x 11.7 cm x 8.2 cm)	2 lbs.
1506	3.75" x 4" x 3.3" (9.5 cm x 10 cm x 8.2 cm)	

ORDERING INFORMATION

Model #	Pair Count	Input	Output	Modules	Module Model#
506	6	66	66	None	N/A
506GT*	6	66	66	350V Gas Tube	175-3C1EW-NL
506SS240	6	66	66	240V Solid State	115-6C1FSC-N
1506	6	110	110	None	N/A
1506GT*	6	110	110	350V Gas Tube	175-3C1EW-NL
1506SS240	6	110	110	240V Solid State	115-6C1FSC-N

*Stock item