

PROTECTOR PACKS

525, 525RJ, 1525 Series

25 Pair, 5-Pin
Building Entrance
Protector Packs

CPE/Premise Wiring


DOT

MDU

PON

Utility/Municipality

Wireless

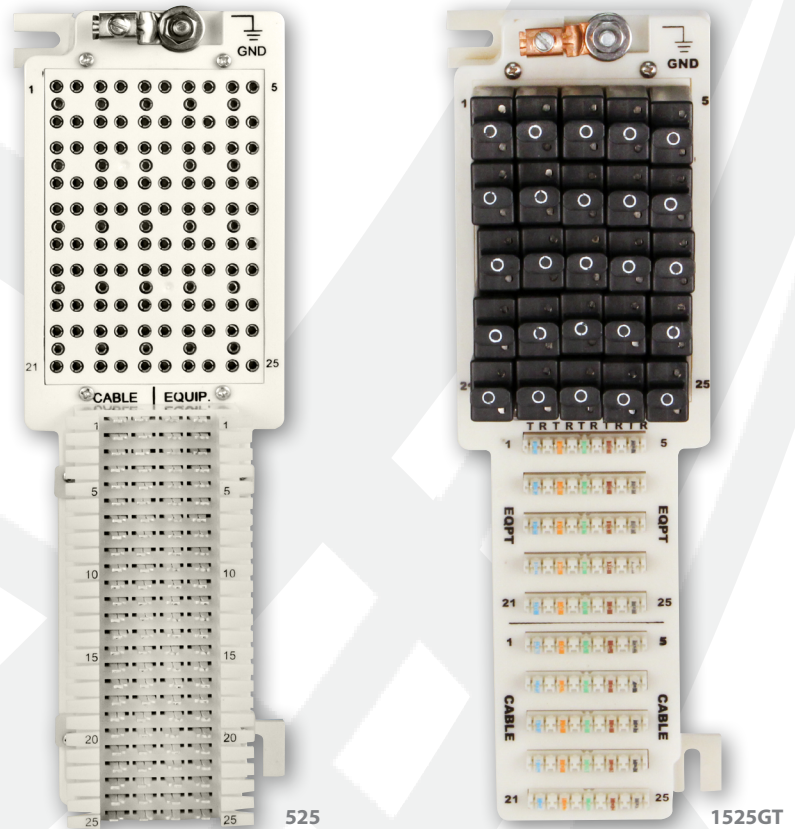

This twenty-five pair, five-pin protector pack series is UL listed for primary/secondary protection and suitable for use at the customer premise demarcation point. Also used for runs between buildings in an industrial, commercial, or campus environment to protect communication networks.

KEY PRODUCT BENEFITS

- ▶ Utilizes industry standard 5-pin protector modules
- ▶ 525 & 1525 feature 66 or 110 IDC termination input and output
- ▶ 525RJ features 66 termination in parallel with RJ21 termination input and output, male or female
- ▶ 525RJ available preloaded with Gas Tube
- ▶ High-impact, fire retardant housing
- ▶ Units can be cascaded to provide for expansion
- ▶ Can be mounted to 89 style stand-off brackets
- ▶ Compact, lightweight design

INDUSTRY STANDARDS

- ▶ UL 497 Listed for primary protection
- ▶ UL 497A & 497B Listed for secondary protection



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive

Edgewood, NY 11717

Phone: 631.789.5000


Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

www.tiitech.com

525, 525RJ, 1525 Series

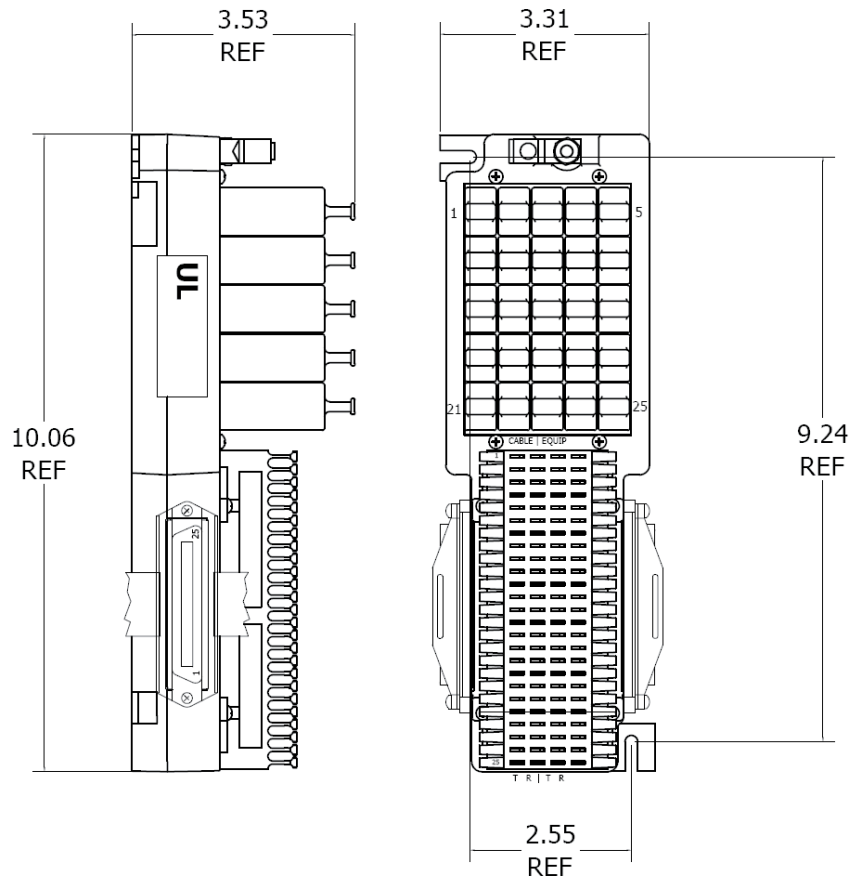

Dimensions are in inches

SPECIFICATIONS

	Dimensions (height x width x depth)	Weight (approx.)
525		
525RJ	10" x 3.4" x 3.5" (25.4 cm x 11.7 cm x 8.2 cm)	2 lbs.
1525		

ORDERING INFORMATION

Model #	Pair Count	Input	Output	Modules	Module Model#
525	25	66	66	None	N/A
525GT*	25	66	66	230V Gas Tube	175-3C1EW-NL
525SS240	25	66	66	240V Solid State	115-6C1FSC-N
525RJ	25	Male RJ21	Female RJ21	None	N/A
525RJGT	25	Male RJ21	Female RJ21	230V Gas Tube	175-3C1EW-NL
1525	25	110	110	None	N/A
1525GT*	25	110	110	350V Gas Tube	175-3C1EW-NL
1525SS240	25	110	110	240V Solid State	115-6C1FSC-N

*Stock item