68M-2S-4

Two Line
Sealed
Wire Terminal
with Home Security
Connections

CPE/Premise Wiring

MDU


Utility/Municipality

Wireless



Corporate Headquarters:

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com

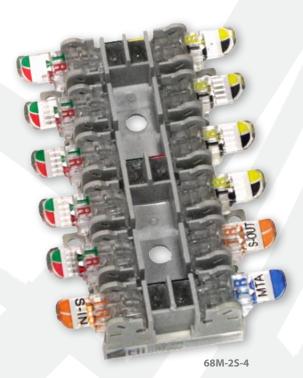


The 68M-2S-4 is designed for applications requiring more than one parallel connection for two pair service, in addition to providing connectivity to a Home Security System.


KEY PRODUCT BENEFITS


- Provides interface connection points for security systems. Each connection is identified for proper wiring
- Incorporates integral sealed test points no additional loose test clips required
- Accommodates multiple extension connections for two line digital voice (or POTS) signals
- Terminations are made to gel-sealed insulation displacement connectors (IDC) by means of convenient tool-less rocker assemblies. Wire stripping is not required.
- Equipped with side wire looms for easy wire management
- Compact, low profile design fits into applications where space is limited
- Accepts 26 through 22 gauge solid conductor wire sizes
- Universally mounts to a suitable flat surface or within a til indoor/outdoor wire terminal housing

INDUSTRY STANDARDS

- Listed to cUL and UL 1863
- CAT6 Compliant







Dimensions are in Inches

ORDERING INFORMATION

Model No.	Description
68M-2S-4	Two Line Sealed Wire Terminal with Home Security Connections