67-2-18 Series

Sealed Wire Terminal

CPE/Premise Wiring

Headend/CO

MDU


Utility/Municipality

Wireless



Corporate Headquarters:

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com

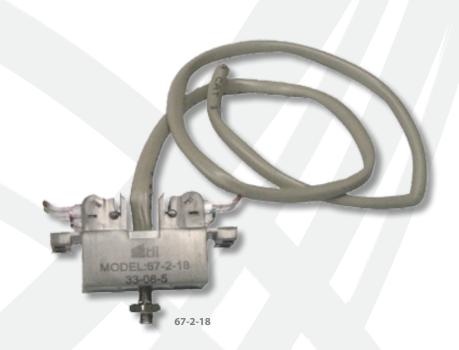

The 67-2-18 Sealed Wire Terminal is designed to replace standard type 103 binding post terminals, typically found in aerial splice closures.


KEY PRODUCT BENEFITS

- Terminations are made to gel sealed insulation displacement contacts (IDC) by means of convenient tool-less rocker assemblies. Wire stripping is not required.
- Compact, low profile design fits into applications where space is limited
- Equipped with 18", 4 pair cable stub and 4 pair outputs via Tii's sealed IDC/ Rocker terminations
- Accepts 26 through 22 gauge solid conductor wire sizes
- Provides an upgraded splicing option with Tii's gel sealed IDC rocker design
- Mounts easily to a suitable flat surface

INDUSTRY STANDARDS

▶ UL listed to 1863

67-2-18 Series

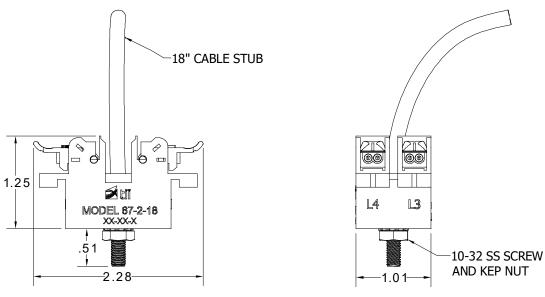

Dimensions are in Inches

ORDERING INFORMATION

Model No.	Description
67-2-18	1 Pair Cable Input, 4 Parallel Pair Outputs, Sealed Wire Terminal with Bottom Screw
67-2-18A	1 Pair Cable Input, 4 Parallel Pair Outputs, Sealed Wire Terminal with Front Screw