NETWORK INTERFACE DEVICES

95S-2

Sealed Customer Bridge Modules (CBM)

CPE/Premise Wiring
DOT
MDU
Utility/Municipality



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive Edgewood, NY 11717 Phone: 631.789.5000 Fax: 631.789.5063 Toll Free: 888.844.4720 sales@tiitech.com

www.tiitech.com




The superior performing 955 Customer Bridge Module is a sealed, environmentally protected unit designed to be compatible with the full line of Tii broadband Network Interface Devices, including the 3700, 3600, 5100, 5300 and the 9600 Series.

KEY PRODUCT BENEFITS


- Internal connections and the RJ-45 jack are protected from moisture and other contaminants
- Customer wire connections utilize gel-sealed IDC (Insulation Displacement Connection) terminations which accept 22 AWG thru 26 AWG solid copper wire
- Convenient rocker feature enables customer to terminate inside wire without the use of tools
- Clear IDC rockers enable easy visual connection verification
- A convenient RJ-45 receptacle test access point provides for troubleshooting at the Network Interface Device (NID)
- Standard features include customer locking with telco bypass and hinged cover

INDUSTRY STANDARDS

- Meets "Severe and Flooded" requirements of Telcordia GR-49 CORE and TR-NWT-001195
- Exceeds Telcordia GR-49 CORE requirements for severe climatic conditions
- Listed to UL 1863



Dimensions are in Inches

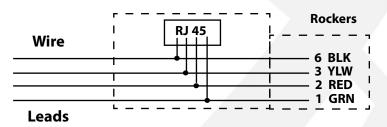

ORDERING INFORMATION

95S—2	-00	—X	
	Electronics	Telco Termination	
	00 = None	1 = Spade Connectors	
Model No.	Description		
95S-2-00-X	Indoor Gel Sealed Contact Indoor Master Jack		

ACCESSORIES

Model No.	Description
9A	Optional Adapter for 95S-2
Å	
E. Ison	

9A Adapter

INFORMATION CONTAINED IN THIS PUBLICATION IS PROVIDED ONLY FOR YOUR CONVENIENCE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. TII TECHNOLOGIES MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE; AND TII TECHNOLOGIES DISCLAIMS ALL LIABILITY ARISING FROM THE USE OF THIS INFORMATION.